

MKBLI12200 12.8V 20Ah



Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.


Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20 C-60 C.

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

Physical Dimension-mm

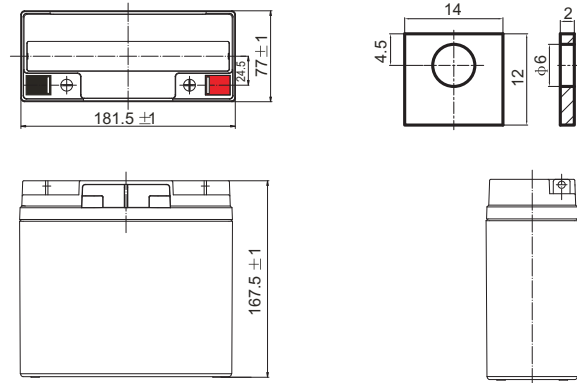

Performance Characteristics

Nominal Voltage	12.8V
Nominal Capacity	20Ah
Energy	256Wh
Internal Resistance(AC)	≤50mΩ
Cycle Life	>2000 cycles @ 1C 100%DOD
Months Self Discharge	<3%
Efficiency of charge	100% @0.5C
Efficiency of Discharge	96-99% @1C
Charge Voltage	14.6±0.2V
Charge Mode	0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV)
Charge Current	10A
Max. Charge Current	20A
Charge Cut-off Voltage	14.6V±0.2V
Rated Discharge Current	10A
Max. Discharge Current	20A
Discharge Cut-off Voltage	10V
Charge Temperature	0 °C to 55 °C (32F to 131F) @60±25% Relative Humidity
Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
Storage Temperature	-20 °C to 45 °C (-4F to 113F) @60±25% Relative Humidity
IP Class	IP65
Plastic Case	ABS
Approx. Dimensions	181.5mm*77mm*167.5mm (7.15in.*3.03in.*6.59in.)
Approx. Weight	2.60kg (5.73lbs)
Terminal	T3

Applications


- Wheelchairs and scooters
- Solar / wind energy storage
- Back-up power for small
- UPS Golf trolleys & buggies
- Electric bikes
- Tools

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.


MKBLI12200 12.8V 20Ah




Different Ratio Discharge Curve (25°C)

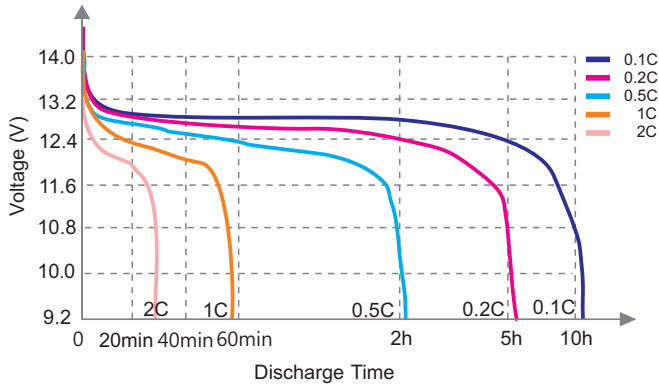


Different Temperature Discharge Curve (0.5°C)

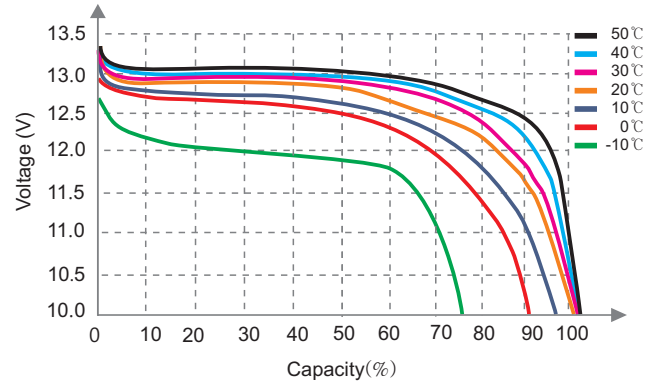


Satate of charge Curve (0.5°C, 25°C)

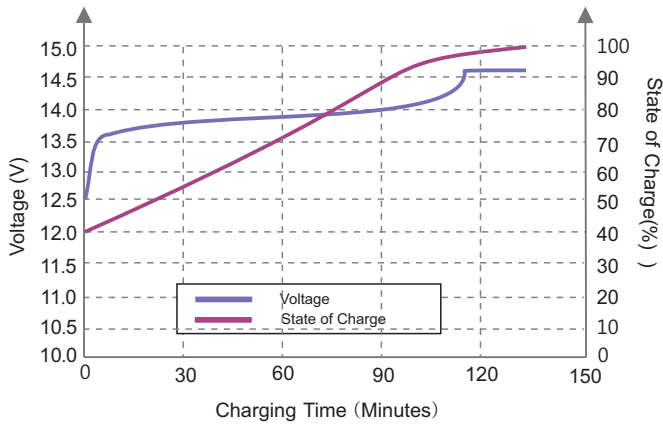


Charging Characteristics (0.5°C, 25°C)

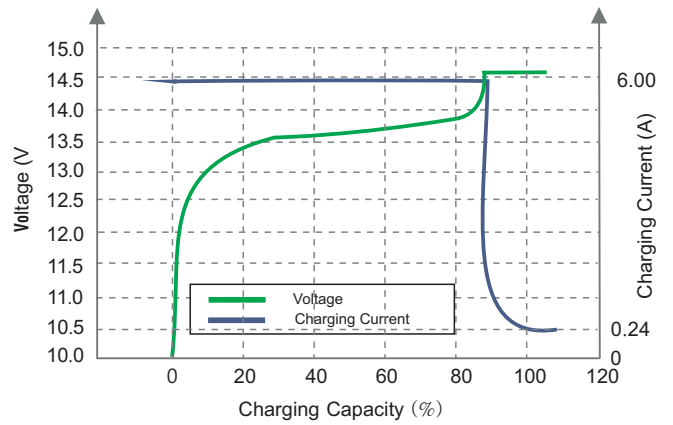

Satate of charge Curve (0.5°C, 25°C)

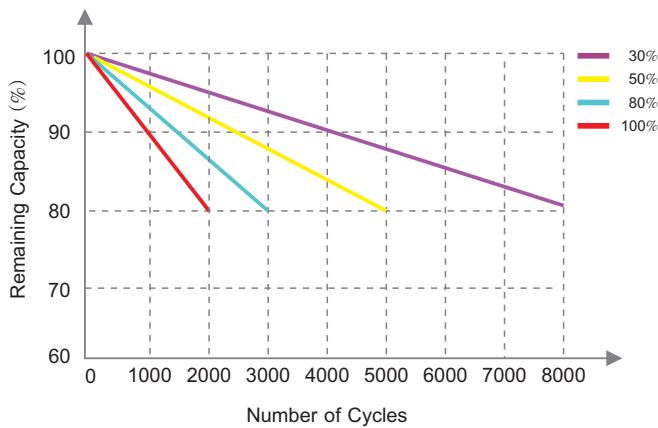

Satate of charge Curve (0.5°C, 25°C)

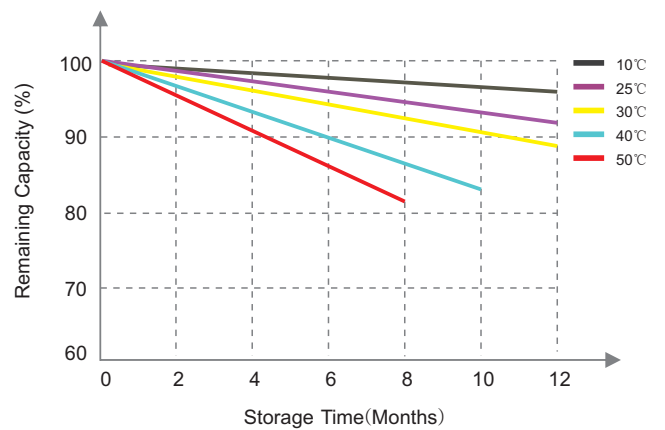

IMPORTANT NOTE: The specifications presented herein are subject to revision without notice.